

4500 Tractor


TRACTOR COMPATIBILITY KEY:

3400

4500

SLOPE SPECIFICATIONS

Maximum Slope Rating (any direction)

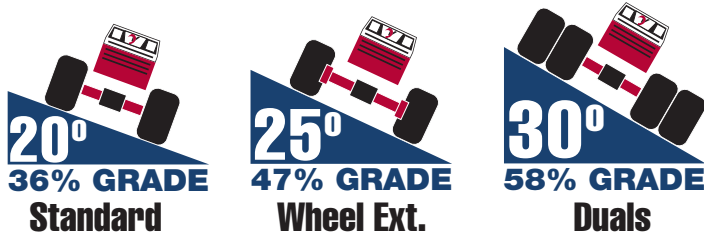

Max Slope Rating
in any direction

**Single
Tires**

**Wheel
Extensions**

Dual Wheels

4500*	20° (36%)	25° (47%)	30° (58%)
4500Z with Propane	15° (27%)	20° (36%)	25° (47%)
4500 with Cab		10° (18%)	
4500 with Spreader		10° (18%)	

*Attachments, accessories, and tire configuration may reduce the 4500 power unit's maximum angle of operation. Refer to applicable operator manuals for maximum angle of operation of equipment.



Digital Slope Gauge
Recommended for operation on slopes.

ENGINE RATINGS

Model #	4500K	4500P	4500Y	4500Z	
Engine	B&S Vanguard Model 54	Kawasaki FD851D	Kubota D902	Kubota WG972-GL	
Fuel	Gas	Gas (DFI)	Diesel	Gas	Propane**
Max Slope Intermittent Use***	30° (58%) [^]	30° (58%)	30° (58%) [^]	30° (58%) [^]	25° (47%) [^]
Max Slope Continuous Use***	25° (47%)	30° (58%)	20° (36%)	20° (36%)	20° (36%)

** With Optional Propane Kit for 4500Z

*** For slope operation over 20°, Wheel Extensions are required for up to 25° or Dual Wheels are required for up to 30°

Intermittent Use Defined

[^] The engine may operate between 20° and 30° for up to 10 minutes. If 10 minutes is reached, the engine must be returned to 20° or less to assure proper oil lubrication. After returning to 20° or less, the intermittent cycle can be repeated. The 4500P Kawasaki DFI engine is rated for 30° continuous operation and does not have this requirement.

All specifications subject to change without notice or obligation



500 Venture Drive
Orrville, OH 44667
1.866.836.8722

Fax: 330.683.0000
www.ventrac.com
info@ventrac.com