Vacuum Collection System 4000 series

RV600

The Ventrac **RV600** Vacuum Collection System is for grass and leaf collection, and it consists of three primary components:

1. the **bin assembly** - mounts to the rear of 4000 series tractors^ (see next page for compatible units)
2. the **suction/blower system** - powered by a 9HP B&S Vanguard engine with electric start for efficient pickup and superior performance
3. **high lift mechanism** - hydraulically raise the collection bin up to 60” and dump to unload the contents into a garbage bin or trailer.

The vac requires a storage system when dismounted. The included storage stands with caster wheels are used when it is to be parked or moved around on a level floor. The optional docking station may be anchored to the floor of a truck or trailer to position the collection system for transport.

Standard Features:

- All steel construction
- Hydraulic lift and dump
- Electric start engine
- Collection boot is quickly and easily attached to the mower deck
- Handle on hose and hose end for ease of vacuuming flower beds, etc.
- Hose clamp for attaching hose to collection boot is an over-center clamp for ease of connecting
- Storage Stand

Optional Accessory:

- Docking Station

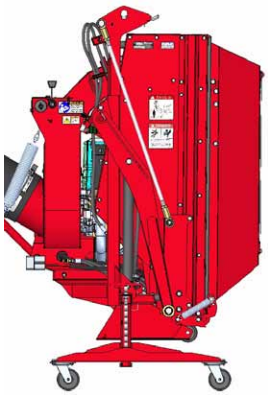

VENTRAC® MOUNT SYSTEM

328 East Water St • PO Box 148 • Orrville, OH 44667
330.683.0075 • 1.866.VENTRAC (836.8722)
Fax: 330.683.0000
www.ventrac.com • info@ventrac.com

Specifications

Vacuum Collection System 4000 series

RV600

	RV600^
Stock Code	39.55360
Collection Bin Capacity	13 cu ft recommended; 16 cu ft maximum
Lift Capacity	300 lbs (136 kg)
Lifting Height	60 inches (152 cm)
Lifting Time	5 seconds
Lowering Time	4 seconds
Fan Blades	5
Hose Diameter	8 inches (20.3 cm)
Engine	B&S Vanguard 9HP, 3600RPM, single cylinder, horizontal shaft
Boot Kit Options (choose one)	
HM602 Collection Boot*	70.8090
HM722 and HP722 Collection Boot**	70.8091
Hitch System Options (choose one)	
Hitch System, Fast connect (no 3pt)	70.8093
Hitch System, Pin Connect	70.8094
Hitch System, Fast connect for tractors with 3pt hitch frame	70.8095
Optional Accessory	
Docking Station	70.8092
Dimensions	
Length	40 inches (102 cm)
Width	65 inches (165 cm)
Height	53 inches (135 cm)
Weight	525 lbs (238 kg)

All specifications subject to change without notice or obligation

* Compatible with all HM602 mower decks. HM600 mower decks (serial HM600-AA1263 and higher) require installation of Flexible Discharge Chute, part 70.8059. Collection boot is NOT compatible with serials HM600-AA1001 to HM600-AA1262.

** Compatible with all HM722 and HP722 mower decks. HM720 mower decks (serial HM720-AA1135 and higher) and HP720 mower decks (serial HP720-AA1026 and higher) require installation of Flexible Discharge Chute, part 70.8059. Collection boot is NOT compatible with serials HM720-AA1001 to HM720-AA1134 or HP720-AA1001 to HP720-AA1025.

^ For use with 4100 tractors (serial 4100-KEC1501 and higher) and 4200 tractors (serial 4200-*EB2555 and higher). Tractor must be equipped with 3pt hitch or rear hydraulic kit for operation of the RV600.

VENTRAC

328 East Water St • PO Box 148 • Orrville, OH 44667
330.683.0075 • 1.866.VENTRAC
Fax: 330.683.0000
www.ventrac.com • info@ventrac.com